

SELF ADHESIVE BITUMEN FLASHING TAPE WITH ALUMINIUM FILM

BITUMEN FLASHING TAPE - BTT

TECHNICAL DATA

1.0 DESCRIPTION


Self-adhesive sealing tape with bitumen based adhesive compound laminated by a reinforced aluminium film. Bitumen Flashing Tape is highly adhesive, even at low temperatures. Available in 10m roll, 75mm or 100mm wide.

2.0 USES

- Sealing, repairing gutters, most types of roofing, pipes, sky lights
- General flashing applications for dielectric insulation
- General Sealing / DIY

3.0 ADVANTAGES

- UV resistant
- Waterproof and self-sealing
- Excellent adhesion to most materials
- Excellent dielectric insulation
- Easy application for high technical use

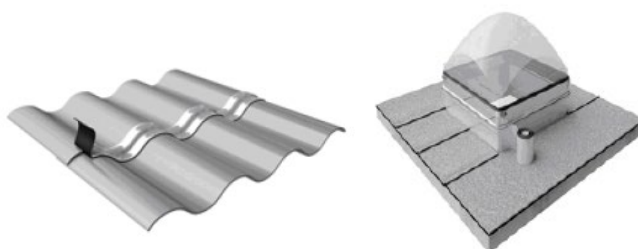

PRODUCT DATA SUMMARY (Actual values may vary from the samples tested.)

CHARACTERISTICS	VALUE	TEST
Thickness	1mm	
Tensile Strength (N/25mm)	134	ASTMD 1000
Elongation	91%	ASTMD 1000
Peel adhesion strength on steel (180° peel N/25mm)	75	ASTMD 1000
Vertical flow (6hrs 80°C)	4	
Vertical flow (6hrs 140°C)	<0mm	
Application Temperature	-5°C / +45°C	
Service Temperature	-40°C / +80°C	

MANUFACTURERS/SUPPLIERS NOTE:

The information provided in this technical bulletin is as up-to-date and correct in detail as possible and is intended to give a fair description of the product and its capabilities. The user of these materials must satisfy themselves with the suitability for a particular application. If unsure about use with certain chemicals, please contact the supplier.